




23-131 Whitmore Rd.  
 Woodbridge, ON L4L 6E4  
 Tel: 289.371.0222 Fax: 289.371.0223  
 www.trillco.com

PART NO	Emitting Color	Forward Voltage (AC/DC) Unit: V	Totally Luminous Intensity Unit: LM	Single LED Intensity Unit: mcd	Dominant Wavelength Unit: nm	Viewing Angle Unit: deg	Color Temperature Unit: K
BA9S-LED24RNHD	Red	24	0.60	650	630	95	<=1700
BA9S-LED24YNHD	Yellow	24	0.75	780	595	95	<=1700
BA9S-LED24GNHD	Green	24	1.0	1190	525	95	7400
BA9S-LED24BNHD	Blue	24	0.15	398	470	95	>=25000
BA9S-LED24WNHD	White	24	0.8	1165	X:0.29 Y:0.28	95	8800
Test Condition	Power: 0.6 W	Current: 15mA		IF=15mA	IF=15mA	IF=15mA	

BA9S-LED120RNHD	Red	120	0.9	700	630	95	<=1700
BA9S-LED120YNHD	Yellow	120	1.0	850	595	95	<=1700
BA9S-LED120GNHD	Green	120	2.6	2500	525	95	7400
BA9S-LED120BNHD	Blue	120	0.3	550	470	95	>=25000
BA9S-LED120WNHD	White	120	2.9	2600	X:0.29 Y:0.28	95	8800
Test Condition	Power: 0.6 W	Current: 15mA		IF=20mA	IF=20mA	IF=20mA	

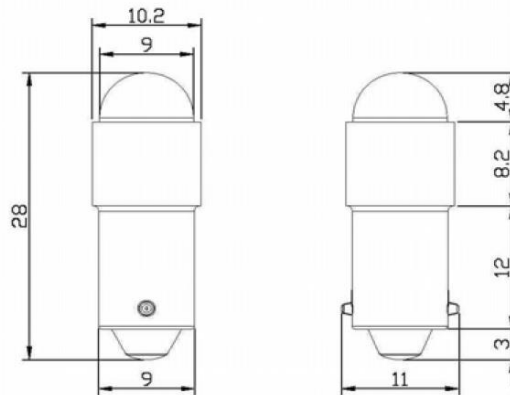

**SUPER BRIGHT LED**  
 9 mm Bayonet BA9s standard industrial pilot light & illuminated pushbutton  
 Single chip ultra bright design  
 Available in 220v,120v, 24v,12v and 6v AC/DC.  
 Extended life up to 100,000 hr / 11 years +